


COMPUTER VISION

Robust estimation

Emanuel Aldea <emanuel.aldea@u-psud.fr>
<http://hebergement.u-psud.fr/emi/>

Computer Science and Multimedia Master - University of Pavia

Back to our simple motivator

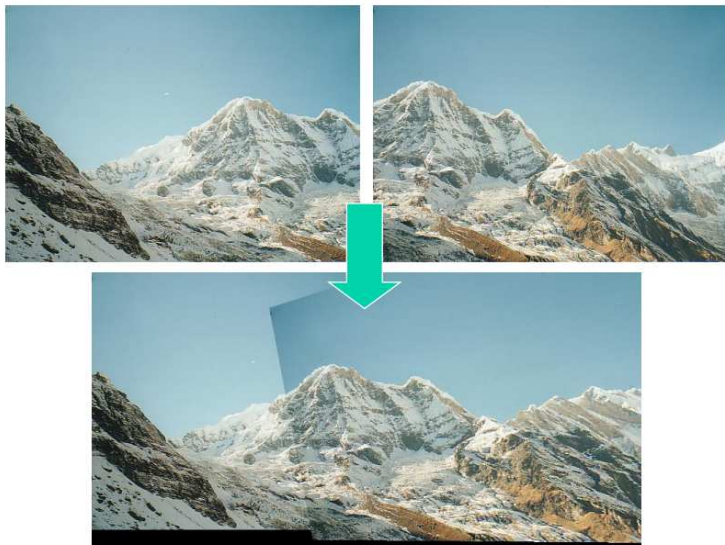

Objective of the procedure

Panoramic reconstruction

Problem

- ▶ Corner detection and association
- ▶ Observation (x, y, x', y') : the corner (x, y) in the first image is associated to the corner (x', y') in the second image
- ▶ if pure camera rotation pure between the two images $\tilde{\mathbf{x}}' = \mathbf{H}\tilde{\mathbf{x}}$ where :

$$\begin{bmatrix} wx' \\ wy' \\ w \end{bmatrix} = \begin{bmatrix} h_{00} & h_{01} & h_{02} \\ h_{10} & h_{11} & h_{12} \\ h_{20} & h_{21} & h_{22} \end{bmatrix} \begin{bmatrix} x \\ y \\ 1 \end{bmatrix}$$

- ▶ by developing, we get :

$$\begin{cases} x' & = & \frac{h_{00}x + h_{01}y + h_{02}}{h_{20}x + h_{21}y + h_{22}} \\ y' & = & \frac{h_{10}x + h_{11}y + h_{12}}{h_{20}x + h_{21}y + h_{22}} \end{cases}$$

Panoramic reconstruction

Problem

- ▶ the unknowns are the different h_{ij}

$$\begin{cases} x'(h_{20}x + h_{21}y + h_{22}) = h_{00}x + h_{01}y + h_{02} \\ y'(h_{20}x + h_{21}y + h_{22}) = h_{10}x + h_{11}y + h_{12} \end{cases}$$

$$\begin{bmatrix} x & y & 1 & 0 & 0 & 0 & -x'x & -x'y & -x' \\ 0 & 0 & 0 & x & y & 1 & -y'x & -y'y & -y' \end{bmatrix} \begin{bmatrix} h_{00} \\ h_{01} \\ h_{02} \\ h_{10} \\ h_{11} \\ h_{12} \\ h_{20} \\ h_{21} \\ h_{22} \end{bmatrix} = \begin{bmatrix} 0 \\ 0 \end{bmatrix}$$

Panoramic reconstruction

$$\begin{bmatrix} x_1 & y_1 & 1 & 0 & 0 & 0 & -x'_1 x_1 & -x'_1 y_1 \\ 0 & 0 & 0 & x_1 & y_1 & 1 & -y'_1 x_1 & -y'_1 y_1 \\ \vdots & \vdots & \vdots & \vdots & \vdots & \vdots & \vdots & \vdots \\ x_n & y_n & 1 & 0 & 0 & 0 & -x'_n x_n & -x'_n y_n \\ 0 & 0 & 0 & x_n & y_n & 1 & -y'_n x_n & -y'_n y_n \end{bmatrix} \begin{bmatrix} h_{00} \\ h_{01} \\ h_{02} \\ h_{10} \\ h_{11} \\ h_{12} \\ h_{20} \\ h_{21} \end{bmatrix} = \begin{bmatrix} x'_1 \\ y'_1 \\ \vdots \\ x'_n \\ y'_n \end{bmatrix}$$

\mathbf{H} is determined modulo a multiplicative factor, thus we can set h_{22} to 1.
We note that in order to estimate the homography we need $n = 4$ observations.
We must solve $\mathbf{A}\mathbf{h} = \mathbf{b}$ - easy!

Panoramic reconstruction

$$\begin{bmatrix} x_1 & y_1 & 1 & 0 & 0 & 0 & -x'_1 x_1 & -x'_1 y_1 \\ 0 & 0 & 0 & x_1 & y_1 & 1 & -y'_1 x_1 & -y'_1 y_1 \\ \vdots & \vdots & \vdots & \vdots & \vdots & \vdots & \vdots & \vdots \\ x_n & y_n & 1 & 0 & 0 & 0 & -x'_n x_n & -x'_n y_n \\ 0 & 0 & 0 & x_n & y_n & 1 & -y'_n x_n & -y'_n y_n \end{bmatrix} \begin{bmatrix} h_{00} \\ h_{01} \\ h_{02} \\ h_{10} \\ h_{11} \\ h_{12} \\ h_{20} \\ h_{21} \end{bmatrix} = \begin{bmatrix} x'_1 \\ y'_1 \\ \vdots \\ x'_n \\ y'_n \end{bmatrix}$$

If $n > 4$, then the system is overdetermined. In order to find the least square solution for $\mathbf{A}\mathbf{h} = \mathbf{b}$, one has to :

1. compute the Singular Value Decomposition (the SVD) of \mathbf{A} : $\mathbf{A} = \mathbf{U}\mathbf{D}\mathbf{V}^T$
2. compute $\mathbf{b}' = \mathbf{U}^T \mathbf{b}$
3. find \mathbf{y} defined as $y_i = b'_i / d_i$
4. the solution is $\mathbf{h} = \mathbf{V}\mathbf{y}$

Robust estimation

What if some of the n observations are wrong?

- ▶ this will create major problems

Robust estimation

What if some of the n observations are wrong?

- ▶ this will create major problems
 - ▶ obviously for $n = 4$ we will get a different solution

Robust estimation

What if some of the n observations are wrong ?

- ▶ this will create major problems
 - ▶ obviously for $n = 4$ we will get a different solution
 - ▶ but even for an over determined system, the outlier(s) will have a significant impact (even one outlier may be very detrimental)

Robust estimation

What if some of the n observations are wrong ?

- ▶ this will create major problems
 - ▶ obviously for $n = 4$ we will get a different solution
 - ▶ but even for an over determined system, the outlier(s) will have a significant impact (even one outlier may be very detrimental)
- ▶ all least-square based optimizations are sensitive to outliers

Robust estimation

What if some of the n observations are wrong ?

- ▶ this will create major problems
 - ▶ obviously for $n = 4$ we will get a different solution
 - ▶ but even for an over determined system, the outlier(s) will have a significant impact (even one outlier may be very detrimental)
- ▶ all least-square based optimizations are sensitive to outliers

Objective

- ▶ solve a Computer Vision problem which requires observations

Robust estimation

What if some of the n observations are wrong ?

- ▶ this will create major problems
 - ▶ obviously for $n = 4$ we will get a different solution
 - ▶ but even for an over determined system, the outlier(s) will have a significant impact (even one outlier may be very detrimental)
- ▶ all least-square based optimizations are sensitive to outliers

Objective

- ▶ solve a Computer Vision problem which requires observations
- ▶ ... while at the same time, pruning the bad observations

Robust estimation

What if some of the n observations are wrong ?

- ▶ this will create major problems
 - ▶ obviously for $n = 4$ we will get a different solution
 - ▶ but even for an over determined system, the outlier(s) will have a significant impact (even one outlier may be very detrimental)
- ▶ all least-square based optimizations are sensitive to outliers

Objective

- ▶ solve a Computer Vision problem which requires observations
- ▶ ... while at the same time, pruning the bad observations
- ▶ underlying idea : outliers participate to “strange” solutions

Robust estimation

Problem framework :

- ▶ observations provided by images
 - ▶ interest points (but sometimes contours, regions etc.)
 - ▶ associations : matches, optical flow fields, etc.

Robust estimation

Problem framework :

- ▶ observations provided by images
 - ▶ interest points (but sometimes contours, regions etc.)
 - ▶ associations : matches, optical flow fields, etc.
- ▶ a significant part of the observations is generated by a mathematical model characterized by a set of parameters θ

Robust estimation

Problem framework :

- ▶ observations provided by images
 - ▶ interest points (but sometimes contours, regions etc.)
 - ▶ associations : matches, optical flow fields, etc.
- ▶ a significant part of the observations is generated by a mathematical model characterized by a set of parameters θ

Objective

- ▶ détermine the parameters θ

Robust estimation

Problem framework :

- ▶ observations provided by images
 - ▶ interest points (but sometimes contours, regions etc.)
 - ▶ associations : matches, optical flow fields, etc.
- ▶ a significant part of the observations is generated by a mathematical model characterized by a set of parameters θ

Objective

- ▶ déterminer the parameters θ
 - ▶ in robotics : often a movement estimation/information

Robust estimation

Problem framework :

- ▶ observations provided by images
 - ▶ interest points (but sometimes contours, regions etc.)
 - ▶ associations : matches, optical flow fields, etc.
- ▶ a significant part of the observations is generated by a mathematical model characterized by a set of parameters θ

Objective

- ▶ déterminer the parameters θ
 - ▶ in robotics : often a movement estimation/information
 - ▶ tracking some targets

Robust estimation

Problem framework :

- ▶ observations provided by images
 - ▶ interest points (but sometimes contours, regions etc.)
 - ▶ associations : matches, optical flow fields, etc.
- ▶ a significant part of the observations is generated by a mathematical model characterized by a set of parameters θ

Objective

- ▶ détermine the parameters θ
 - ▶ in robotics : often a movement estimation/information
 - ▶ tracking some targets
 - ▶ the state of a physical system etc.

Robust estimation

Problem framework :

- ▶ observations provided by images
 - ▶ interest points (but sometimes contours, regions etc.)
 - ▶ associations : matches, optical flow fields, etc.
- ▶ a significant part of the observations is generated by a mathematical model characterized by a set of parameters θ

Objective

- ▶ détermine the parameters θ
 - ▶ in robotics : often a movement estimation/information
 - ▶ tracking some targets
 - ▶ the state of a physical system etc.
- ▶ the number of observations is large enough in order to allow us to estimate θ but ...

Robust estimation

Problem framework :

- ▶ observations provided by images
 - ▶ interest points (but sometimes contours, regions etc.)
 - ▶ associations : matches, optical flow fields, etc.
- ▶ a significant part of the observations is generated by a mathematical model characterized by a set of parameters θ



Objective

- ▶ determine the parameters θ
 - ▶ in robotics : often a movement estimation/information
 - ▶ tracking some targets
 - ▶ the state of a physical system etc.
- ▶ the number of observations is large enough in order to allow us to estimate θ but ...
- ▶ presence of outliers which do not respect the model

Toy example

The elastic constant of a string

- ▶ Hooke's law : $F = kx$
- ▶ Objective : $\theta = \{k\}$
 - ▶ we vary N times the applied force, we measure the deformation
 - ▶ N observations $\{(F_i, x_i)\}$
 - ▶ minimal set of measure for determining θ : $K = 2$
 - ▶ in practice we use the N observations for a least square estimation , as the observations are noisy
- ▶ no outliers, all observations are explained by the model

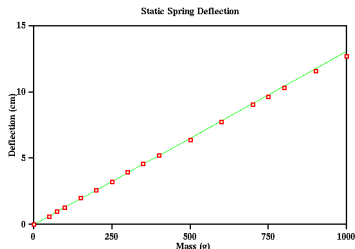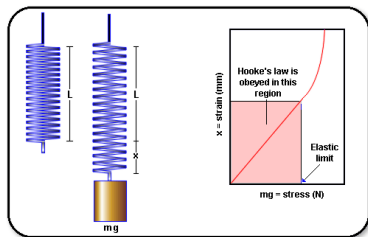

Exemple en vision

Estimating l'ego-mouvement

- ▶ N observations $\{x_i\}_{1 \leq i \leq N}$ (one obs. per pixel)
- ▶ minimal set of size K , $N \gg K$
- ▶ objective : $\theta = \{R, t\}$
- ▶ an algorithm f which provides $\theta = f(x_1, \dots, x_K)$
- ▶ problem : static scene hypothesis
- ▶ **dynamic elements \Rightarrow observations which do not respect the model θ**


Objective : determine θ et along with the valid observations



The source of the problem

Influence of outliers

- ▶ one may not ignore the outliers and determine the parameters of the model

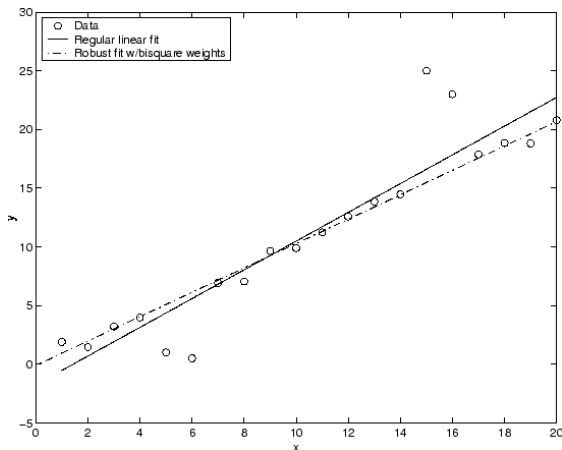

- ▶ the least square based methods are very sensitive to outliers due to the quadratic error function $\rho(r_i) = r_i^2$

Two types of approaches

Analysis of the set of residuals

- ▶ Least Median of Squares (LMedS); we replace the sum by the median of residuals :

$$\min_{\theta} \text{med } \rho(r_i)$$

Two types of approaches

Analysis of the set of residuals

- ▶ Least Median of Squares (LMedS); we replace the sum by the median of residuals :

$$\min_{\theta} \text{med } \rho(r_i)$$

- ▶ Least Trimmed Squares (LTS); sorting the residuals and selecting the first $N/2 < M < N$

$$\min_{\theta} \sum_{i=1}^M \rho(r_i)$$

Two types of approaches

Analysis of the set of residuals

- ▶ Least Median of Squares (LMedS); we replace the sum by the median of residuals :

$$\min_{\theta} \text{med } \rho(r_i)$$

- ▶ Least Trimmed Squares (LTS); sorting the residuals and selecting the first $N/2 < M < N$

$$\min_{\theta} \sum_{i=1}^M \rho(r_i)$$

- ▶ Exhaustive research necessary for K-tuples; breakdown point $\sim 50\%$

Two types of approaches

Analysis of the set of residuals

- ▶ Least Median of Squares (LMedS); we replace the sum by the median of residuals :

$$\min_{\theta} \text{med } \rho(r_i)$$

- ▶ Least Trimmed Squares (LTS); sorting the residuals and selecting the first $N/2 < M < N$

$$\min_{\theta} \sum_{i=1}^M \rho(r_i)$$

- ▶ Exhaustive research necessary for K-tuples; breakdown point $\sim 50\%$

Modifying ρ

Using instead of the quadratic error a different symmetric, positive definite function (see Huber, Tukey etc.) Breakdown point inferior to $1/K$

Two types of approaches

Analysis of the set of residuals

- ▶ Least Median of Squares (LMedS); we replace the sum by the median of residuals :

$$\min_{\theta} \text{med } \rho(r_i)$$

- ▶ Least Trimmed Squares (LTS); sorting the residuals and selecting the first $N/2 < M < N$

$$\min_{\theta} \sum_{i=1}^M \rho(r_i)$$

- ▶ Exhaustive research necessary for K-tuples; breakdown point $\sim 50\%$

Modifying ρ

Using instead of the quadratic error a different symmetric, positive definite function (see Huber, Tukey etc.) Breakdown point inferior to $1/K$

In any case, we must separate the inliers, and only then we can apply the classical LMS.

RANSAC

Random Sample Consensus

1. For T iterations / While we still have computing time

RANSAC

Random Sample Consensus

1. For T iterations / While we still have computing time
 - ▶ random selection of K observations

RANSAC

Random Sample Consensus

1. For T iterations / While we still have computing time
 - ▶ random selection of K observations
 - ▶ exact determination of θ

RANSAC

Random Sample Consensus

1. For T iterations / While we still have computing time
 - ▶ random selection of K observations
 - ▶ exact determination of θ
 - ▶ compute the cardinal of the support for $\theta : \{x_i \text{ t.q. } \rho(x_i, \theta) < \tau\}$

RANSAC

Random Sample Consensus

1. For T iterations / While we still have computing time
 - ▶ random selection of K observations
 - ▶ exact determination of θ
 - ▶ compute the cardinal of the support for $\theta : \{x_i \text{ t.q. } \rho(x_i, \theta) < \tau\}$
2. validate $\hat{\theta}$ having the most consistent support

RANSAC

Random Sample Consensus

1. For T iterations / While we still have computing time
 - ▶ random selection of K observations
 - ▶ exact determination of θ
 - ▶ compute the cardinal of the support for $\theta : \{x_i \text{ t.q. } \rho(x_i, \theta) < \tau\}$
2. validate $\hat{\theta}$ having the most consistent support
3. compute $\tilde{\theta}$ by LMS across the support of $\hat{\theta}$

RANSAC

Random Sample Consensus

1. For T iterations / While we still have computing time
 - ▶ random selection of K observations
 - ▶ exact determination of θ
 - ▶ compute the cardinal of the support for $\theta : \{x_i \text{ t.q. } \rho(x_i, \theta) < \tau\}$
2. validate $\hat{\theta}$ having the most consistent support
3. compute $\tilde{\theta}$ by LMS across the support of $\hat{\theta}$

Parameters

- ▶ τ for including an observation in the support set

RANSAC

Random Sample Consensus

1. For T iterations / While we still have computing time
 - ▶ random selection of K observations
 - ▶ exact determination of θ
 - ▶ compute the cardinal of the support for $\theta : \{x_i \text{ t.q. } \rho(x_i, \theta) < \tau\}$
2. validate $\hat{\theta}$ having the most consistent support
3. compute $\tilde{\theta}$ by LMS across the support of $\hat{\theta}$

Parameters

- ▶ τ for including an observation in the support set
- ▶ the number of draws P

RANSAC


Random Sample Consensus

1. For T iterations / While we still have computing time
 - ▶ random selection of K observations
 - ▶ exact determination of θ
 - ▶ compute the cardinal of the support for $\theta : \{x_i \text{ t.q. } \rho(x_i, \theta) < \tau\}$
2. validate $\hat{\theta}$ having the most consistent support
3. compute $\tilde{\theta}$ by LMS across the support of $\hat{\theta}$


Parameters

- ▶ τ for including an observation in the support set
- ▶ the number of draws P
- ▶ depending on the application and on the inlier proportion


Example in 2D

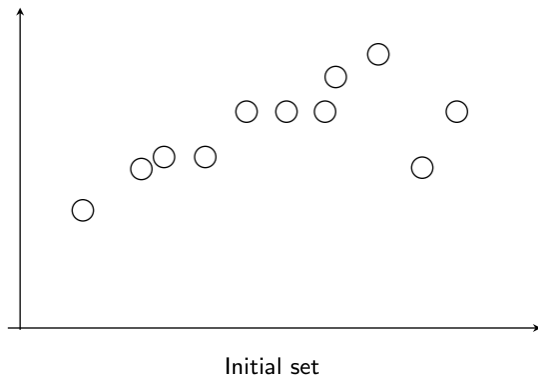


Example in 2D

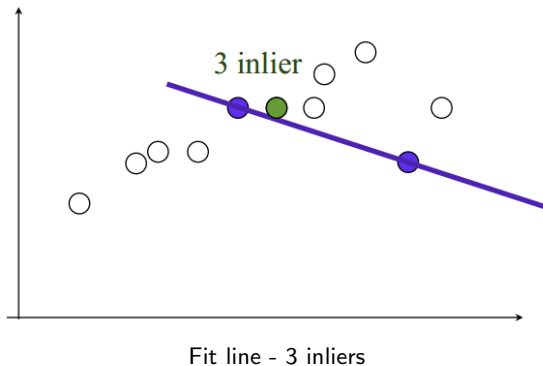


Example in 2D

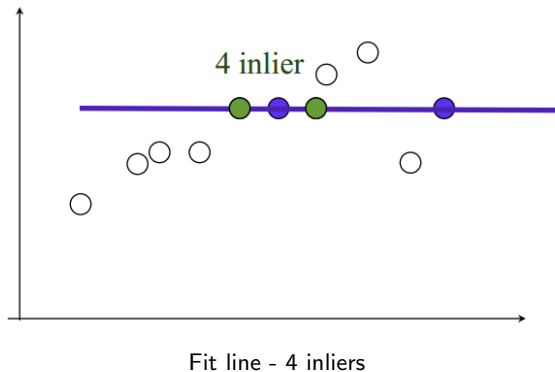


Example in 2D

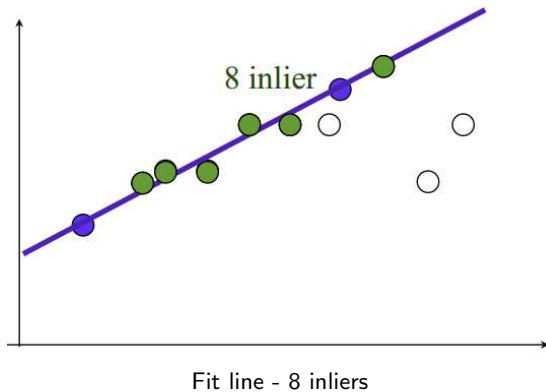

Example in 2D

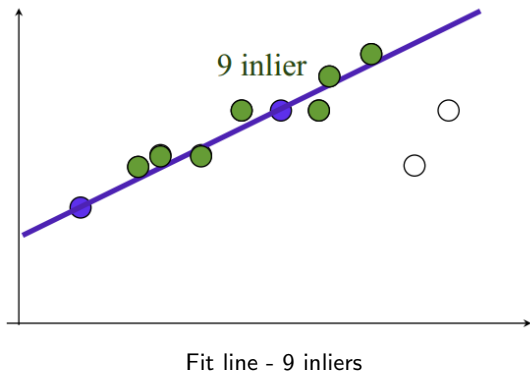

Example in 2D

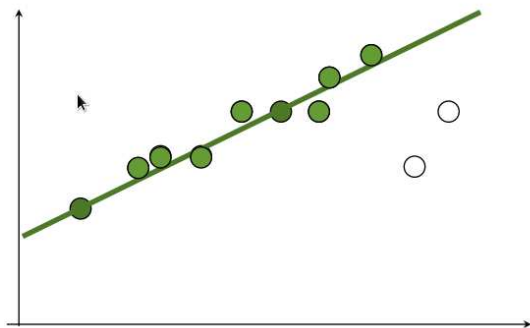

Final estimation by least squares

RANSAC

Question 1

Let us consider a parameter estimation problem with $\theta \in \mathbb{R}^5$. Assuming that the observations exhibit an outlier percentage $f = 0.4$, what is the number of draws T we should perform in order to recover the correct model parameters with a probability $p = 0.99$?

RANSAC

Question 2

Using a LASER device, a small robot has mapped an empty room. The result is a point cloud, in which 40%, 30% et 20% of the points belong to three walls respectively, and 10% of the points represent outliers. What is the number of draws required in order to recover the largest wall with a probability $p = 0.99$?

RANSAC

Question 3

For the same setting as in Question 2, what is the number of draws required in order to recover any wall with a probability $p = 0.99$?

RANSAC

Question 4

For the same setting as in Question 2, propose an algorithm for extracting all the walls from the point cloud.